

**Client Report:**

**Accompanying Report for the  
BRE Environmental Profiles of  
NBT Pavatex insulated  
sarking boards and NBT  
Pavatex insulation boards**

Prepared for: Neil May  
Managing Director  
Natural Building Technologies Ltd.

February 2007

Client report number: **228560**

## **Prepared by**

Name Julia Barnard

Position Consultant

Signature

## **Approved on behalf of BRE**

Name Jane Anderson

Position Principal Consultant

Date

Signature

BRE  
Garston  
WD25 9XX  
T + 44 (0) 1923 664000  
F + 44 (0) 1923 664010  
E [enquiries@bre.co.uk](mailto:enquiries@bre.co.uk)  
[www.bre.co.uk](http://www.bre.co.uk)

This report is made on behalf of BRE. By receiving the report and acting on it, the client - or any third party relying on it - accepts that no individual is personally liable in contract, tort or breach of statutory duty (including negligence).

## Executive Summary

This report forms the output of the Environmental Profiling work done for Natural Building Technologies Ltd (NBT) and the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards produced at both the Fribourg and Cham sites in Switzerland. The report provides a description of the Environmental Profiling process, provides the Environmental Profiles for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards and provides an analysis of the environmental performance of the products. Tables 1a,b and 1c below show the Ecopoint scores for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards on a per tonne basis, and the Green Guide ratings for Pavatex in domestic building elements.

**Table 1a. Product Specification Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards: Cradle to Gate**

Product Specification	Ecopoints Cradle to Gate
NBT Pavatex insulation boards, 1 tonne	-0.33 Ecopoints
NBT Pavatex insulated sarking boards, 1 tonne	-0.79 Ecopoints

**Table 1b. Product Specification Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards: Cradle to Grave**

Product Specification	Ecopoints Cradle to Grave
NBT Pavatex insulation boards, 1 tonne	4.7 Ecopoints
NBT Pavatex insulated sarking boards, 1 tonne	4.3 Ecopoints

The difference in impact between the insulation board and the insulated sarking board is interesting to describe. Within each factory, the manufacture of the insulated sarking board has a higher impact due to the use of additional latex needed to achieve the waterproof properties. But the Fribourg site uses a significant proportion of non-fossil fuels which has a significant reduction on the environmental impact of the products manufactured there. Because the majority (73%) of the insulated sarking board is manufactured at Fribourg, it has a lower impact than the insulation board which is mainly manufactured at Cham (63%).

Although the manufacturing process does produce carbon emissions, the net ecopoint score for cradle to gate is negative due to the quantity of the sequestered carbon within the waste softwood. The cradle to grave score includes the impact of disposal at the end of life.

The waste softwood input has a significant amount of sequestered carbon, which is stored within the boards during their service life. This is released back to the atmosphere when the boards are disposed of.

As plants and trees grow, they absorb carbon dioxide from the atmosphere as part of photosynthesis. This carbon then remains locked in the wood during use, for example as timber or paper, providing a positive environmental benefit. On disposal, the carbon can be:

- released back into the atmosphere as carbon dioxide if it is burnt, rebalancing the environmental impact;
- released as methane if it rots in an enclosed atmosphere such as landfill, causing a much greater environmental impact because methane is a strong greenhouse gas, although the methane can be collected and burnt to produce CO<sub>2</sub> and energy which can be recovered, or;
- the carbon can remain sequestered in the timber if it is reused or recycled, passing the environmental benefit on to the new product.

BRE models the impact of disposal for timber products based on a mix of the above scenarios and applies these impacts to the Environmental Profile of a product within a building element and is disposed of at the end of life.

Looking at the products as a whole, the greatest single environmental impact is through Fossil Fuel Depletion which results primarily from the manufacturing process, for both the NBT Pavatex insulation boards and NBT Pavatex insulated sarking boards. The manufacturing process does also have a significant impact on Climate Change, compared to the input materials; this is however obscured when comparing the impacts of the product as a whole, after combining with the large negative Ecopoint score of the waste softwood.

**Table 1c. Building Element Green Guide for Housing ratings for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.**

Element Specification	Green Guide Rating
Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Pavatherm plus 170 kg/m <sup>3</sup> ), batten, clay tile.	A
Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Isolair 240 kg/m <sup>3</sup> ), batten, clay tile.	A

Element Specification	Green Guide Rating
External Wall:  89mm stud full filled with cellulose insulation with 60mm NBT Pavatex insulation board (Diffutherm 210 kg/m <sup>3</sup> ) and mineral external render.	A
External Wall:  89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m <sup>3</sup> ) and timber cladding.	A
External Wall:  89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m <sup>3</sup> ) and brick slip cladding on galvanised steel supports.	C

The Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards means that they achieve a Green Guide Rating of A (with the exception of one external wall specification), when included in the studied specifications.

The external wall specification which received a C rating uses a brick slip system as the cladding component. This incorporates steel supports and additional energy and waste associated with extra processing of the brick. This, therefore contributes to a larger environmental impact.

Further improvements can be made particularly in the manufacturing process. BRE are able to model modifications in the manufacturing process, (both raw material inputs and the process itself) for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards, to indicate potential improvements.

## Contents

Executive Summary	1
Introduction	6
Section 1 – The Environmental Profiling Process	7
Environmental Profiles: Life Cycle Assessment scheme for construction products	8
Life Cycle Assessment of products	10
Creation of the BRE Environmental Profiles: Procedures	13
For cradle to gate assessments	13
For cradle to site assessments	13
For cradle to grave assessments	14
Creation of BRE Environmental Profiles: LCA methodology	15
Step 1 – Goal and Scope Definition	15
Step 2 – Inventory Analysis	15
Step 3 – Impact Assessment	16
Ecopoints: a single score environmental assessment	17
The format of an Environmental Profile	18
Environmental Profiles	19
Environmental Profiles Generated for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards	20
Section 2 – Analysis of Environmental Profiles for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards	21
Analysis approach	22
Findings	23
Linking Environmental Profiles to other Sustainable Construction Tools	33
BREEAM	33
EcoHomes	33
The Green Guide to Housing Specification	34
Green Guide to Specification	34
Conclusion and Recommendations	35
Annex 1 – Environmental Profile: Characterised and normalised data for 1 tonne of NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.	38

Annex 2 – Environmental Profile: Characterised and normalised data for 1 m <sup>2</sup> of installed NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.	39
Annex 3 – Environmental Profile: Characterised and normalised data for 1 m <sup>2</sup> NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards over a 60-year study period.	40
Annex 4 - Impact categories considered in BRE LCA methodology.	41

## Introduction

This report forms the output from the 'Environmental Profiles of NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards' project undertaken for Natural Building Technologies Ltd.

The aim of this report is to provide explanatory information to accompany the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards Environmental Profiles. The report is divided into three sections:

- **Section 1: The Environmental Profiling Process** – this section of the report explains the principles of Life Cycle Assessment and the creation of an Environmental Profile.
- **Section 2: In depth analysis of the Environmental Profiles for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards**– this section of the report highlights the most important sources of the product's environmental impact and relevant environmental issues.
- **Appendices** – this section contains the Environmental Profiles for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.

Details of the Pavatex production process were provided by Pavatex in Switzerland, through the completion of a questionnaire, a site visit and subsequent telephone and e-mail correspondence.



## **Section 1 – The Environmental Profiling Process**

This section of the report explains the principles of Life Cycle Assessment (LCA) and the creation of an Environmental Profile.

## Environmental Profiles: Life Cycle Assessment scheme for construction products

Claims about the environmental performance of building products are easy to make, but difficult to substantiate without a universal measuring system. Environmental Profiles provide that measurement and enable manufacturers to independently demonstrate the performance of their products. They also help clients, designers and specifiers to identify products that will best fulfil a sustainability brief.

As well as underpinning claims of environmental performance, Environmental Profiles enable manufacturers to compare their products against others, to demonstrate improvements that have been made and help raise general awareness of life cycle issues.

### Do Profiles relate to the full life cycle?

YES – Environmental Profiles measure environmental performance throughout a product's life:

- in manufacture (including impacts from virgin and recycled inputs)
- in use in a building (taken over a typical building life and including maintenance and replacement)
- in demolition (the waste produced, allowing for recycling and reuse).

Profiles provide key indicators of environmental sustainability:

- *Climate change* - from CO<sub>2</sub> and other greenhouse gases especially associated with energy use
- *Ozone depletion* - from gases affecting the ozone layer
- *Acidification* -contribution to the formation of acid rain
- Consumption of *minerals* and *water*
- Emission of *pollutants to air and water* – including toxicity to humans and ecosystems
- Quantity of *waste* sent to disposal.

- Ecopoint rating - a single measure of overall impact

### **Profiling individual materials, components and building elements**

At its simplest level the profiling method is able to consider the impacts of a single building product, such as brick. However, to make valid comparisons designers need information about a building element, for example a wall. A building element is likely to be made up of several products and Environmental Profiling takes this into account by adding together the contribution of the component parts. This allows specifiers to compare one type of element with another. The comparison may be between product types or the same product from different manufacturers.

### **Credibility**


The Life Cycle Assessment methodology used for Environmental Profiles has been peer reviewed and complies with ISO14041, an internationally established approach for analysing the environmental impacts of products and processes. The system fits well with the ISO14001 environmental management principles.

BRE devised the methodology in partnership with Government and 24 Trade Associations from the Construction Products sector to provide a single, consistent approach for applying LCA to all types of construction products. An Environmental Profile approved by BRE Certification is prepared according to Scheme Document SD028 (available from BRE Certification).

Environmental Profiles provide environmental information about construction products for different stages of their life cycle and can be used as both an environmental management tool by manufacturers and as an aid to environmental design and procurement by designers and specifiers.

## Life Cycle Assessment of products

All construction products have a "life cycle":

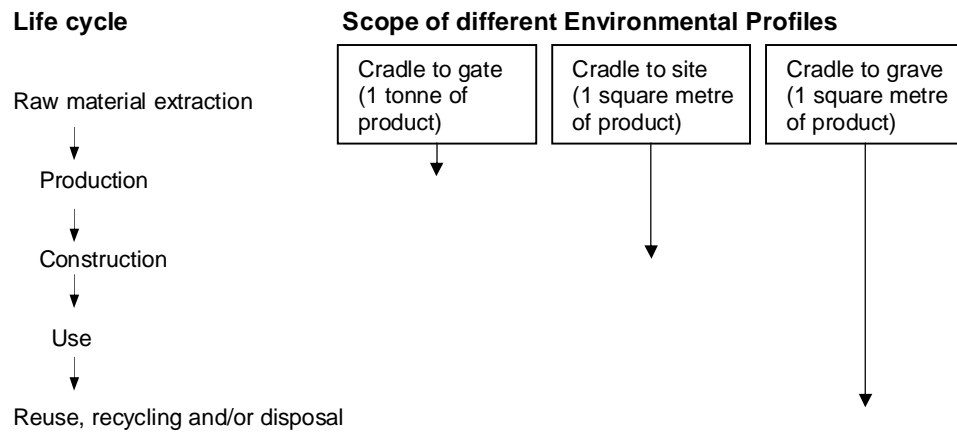

Each stage in the life cycle has its own inputs (e.g. materials and energy) and outputs (e.g. emissions and waste). There are also environmental impacts related to the transport of the product between life cycle stages.

The BRE Methodology allows Environmental Profiles to be created for different stages of the life cycle. These life cycle stages are illustrated in the diagram above and in Table 2. BRE do this to allow manufacturers and specifiers the greatest amount of flexibility from the data available to them.

**Table 2 Life cycle stages**

Assessment	Life Cycle Stages considered
One tonne of product	"Cradle to gate" - Raw material extraction and manufacture through to the point the product leaves the factory gate
One square metre of a building element	"Cradle to site" - Raw material extraction and manufacture through to installation at the construction site, including transport to the site. (Theoretically, impacts of construction would also be included here, but in practice are excluded due to their relatively small size)
One square metre of a building element	"Cradle to grave" - Raw material extraction, manufacture, installation and use in a building for a 60 year study period <sup>1</sup> including any associated maintenance and replacement, through to the point of removal for reuse, recycling or disposal.

**"Cradle to gate" assessment**

This type of assessment evaluates the environmental impact of the production of 1 tonne of product. The resulting BRE Environmental Profile is useful for both the comparison of identical products produced differently – e.g. in different locations or with different processes - and for the monitoring of production improvements over time. This Profile also provides the basic data to allow the impact of the whole life cycle to be considered.

**"Cradle to site" assessment**

This type of assessment evaluates the environmental impact on the basis of 1 m<sup>2</sup> of element (e.g. a wall with blocks, plasterboard and insulation).

A building element is likely to be made up of several products and Environmental Profiling takes this into account by adding together the contribution of the component parts. This allows specifiers to compare one type of element with another. The comparison may be between different product types or the same product from different manufacturers.

The "cradle to site" Profile allows the user to see the burden from the product in the context of different components in a specific function. However, they must apply their own life time factors for replacement, maintenance and disposal to achieve a true life cycle. This type of Profile is deliberately left free of replacement and maintenance data to allow the user to customise the data.

**"Cradle to grave" assessment**

This type of assessment evaluates the environmental impact on the basis of 1 m<sup>2</sup> of a building element and takes into account the maintenance, replacement and disposal

<sup>1</sup> The BRE Environmental Profiles methodology has been devised specifically for application to construction products in commercial buildings, hence a life cycle period of 60 years. However, it may also be applied to domestic buildings, infrastructure and other applications, where appropriate design lives may be applied.

rates of the element for a sixty year study period. The resulting BRE Environmental Profile can be compared to other elements which perform the same function in the building (eg. For a wall the thermal resistance, acoustics and damp proof properties will ideally be identical to make a comparison between different types of construction). To make comparisons, the building elements should be exposed to the same assumptions on construction impacts, maintenance, replacement, demolition and disposal.

Only this type of profile provides the results of a full life cycle assessment and is therefore the type of data on which it is most appropriate to make claims about your product compared to others.

## Creation of the BRE Environmental Profiles: Procedures

The Life Cycle Assessment methodology used to produce the BRE Environmental Profiles is covered in detail in the BRE Environmental Profiles Methodology<sup>2</sup>. However, the steps below provide a brief outline of the procedure followed when creating an Environmental Profile.

### For cradle to gate assessments

1. BRE process the data provided by manufacturers in the BRE questionnaire to produce a list of inputs and outputs to the process for 1 tonne of product. This is a "gate to gate" assessment.
2. BRE add to this data the upstream inputs and outputs associated with all the materials brought into the factory. In other words, they trace to the 'cradle'. For example if a site buys cement, the impact of making cement is included. BRE already has data on many materials but if required, specific data is collected from other databases or manufacturers.
3. The environmental impacts associated with all the inputs and outputs are then calculated using standard LCA impact assessment procedures (known as "classification", "characterisation" and "normalisation"). These are described briefly in the following section of this report and in more detail in the BRE Environmental Profiles Methodology.

### For cradle to site assessments

In addition to steps 1-3:

4. The Environmental Profile product is assessed together with any other materials needed to produce 1 m<sup>2</sup> of element, e.g. if the main product is a roof tile, then felt and battens will be added to make a full roof element.
5. This assessment covers impacts due to transport from the factory to the site and subsequent installation. The mass of NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards is then used in a typical specification to allow the environmental impact of the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards to be reviewed in terms of 1 m<sup>2</sup> rather than 1 tonne. This allows the product to be compared with other products in a 'like for like' manner.

---

<sup>2</sup> Howard, N, Edwards, S, Anderson, J. 1999. *BRE Methodology for Environmental Profiles of Construction Materials, Components and Buildings*. CRC: London.  
[www.bre.co.uk](http://www.bre.co.uk)

**For cradle to grave assessments**

In addition to steps 1-5:

6. BRE add data on the maintenance, replacement and end of life scenario of the product and other materials allowing the environmental impacts of the element to be calculated over a 60 year study period.



## Creation of BRE Environmental Profiles: LCA methodology

BRE life cycle assessments can be divided into three distinct steps, although in practice, the life cycle assessment is an iterative process.

### Step 1 – Goal and Scope Definition

The goal of the study defines the reason for carrying out the assessment, the target audience and the intended use of results. Defining the scope of the study entails the setting of system boundaries, which will include defining geographical and temporal limits, as well as deciding which life cycle stages are to be included in the assessment. For example, the BRE Environmental Profile in Annex 1 is for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards; in this case the scope has been defined as a Cradle to Gate assessment, using production data from the year 2005.

### Step 2 – Inventory Analysis

During this phase, data on all the inputs and outputs of the product system under study are calculated for all appropriate life cycle stages. This list of inputs and outputs is known as Inventory data. Once the process boundaries have been defined, and the data allocated to the relevant product, the inputs and outputs are processed to refer to 1 tonne of product.

### Step 3 – Impact Assessment

The impact assessment phase is aimed at evaluating the data calculated in the inventory analysis in terms of their environmental impact. The BRE Methodology breaks this phase into a further 3 stages:

#### *Stage 1: Classification*

The impact categories are selected and the inputs and outputs from the inventory are then assigned to the appropriate impact category. Each input or output can contribute to one or more impact category (e.g. methane contributes to climate change *and* photochemical ozone creation). A list of the 13 impact categories considered in the BRE LCA methodology is shown below:

- Climate change
- Acid deposition
- Ozone depletion
- Pollution to air: Human toxicity
- Pollution to air: Low level ozone depletion
- Transport pollution and congestion: Freight<sup>3</sup>
- Fossil fuel depletion and extraction
- Pollution to water: Human toxicity
- Pollution to water: Ecotoxicity
- Pollution to water: Eutrophication
- Minerals extraction
- Water extraction
- Waste disposal

See Annex 4 for a more detailed list describing the impact categories currently considered in the BRE Environmental Profiles Methodology.

#### *Stage 2: Characterisation*

The characterisation step evaluates the relative importance of the different burdens under each impact category compared to a reference unit (e.g. for climate change the reference unit is "one kg of CO<sub>2</sub> equivalent emitted over 100 years"). The characterisation stage results in the contributions to each impact category being expressed as equivalent amounts of emitted reference unit; these contributions can then be summed to give a final category score. For example, for global warming, 1 tonne of CO<sub>2</sub> is considered to have an impact of 1 whereas 1 tonne of methane has 21 times more global warming potential than CO<sub>2</sub> (and therefore has an impact of 21).

#### *Stage 3: Normalisation*

A comparison between impact categories is still difficult because the data are represented in different units. One solution to this problem is "normalisation". In the BRE Environmental Methodology this relates the amount of environmental impact arising from

<sup>3</sup> It should be noted that due to European competition legislation, BRE are not able to include this as an impact in the final Ecopoint score. This means an aggregation of 12 Environmental impacts and not 13.

the product to the impacts arising from activity associated with an average UK citizen over one year.

This expresses the environmental impact for each category as a dimensionless ratio because the different impacts become "dimensionless" they can be added together. This is useful to show how important the impacts of a product are compared to the reference point of one person (whose total impact is, therefore, "1"). Normalising the data may allow you to add the data but it does not allow you to distinguish the most important impacts from the least. To do this, it is necessary to weight the impacts. BRE has created a single score system for environmental impacts that takes into account the relative importance of different impacts. This is known as Ecopoints and is described in the next section.

## **Ecopoints: a single score environmental assessment**

The environmental impacts of construction encompass a wide range of issues, including climate change, mineral extraction, ozone depletion and waste generation. Assessing such different issues in combination requires subjective judgements about their relative importance. For example, is a product with a high global warming impact that does not pollute water resources giving less overall environmental impact than a product that has a low global warming impact but produces significant water pollution? To enable such assessments, BRE has developed Ecopoints.

### **Normalised Environmental Impacts**

Each environmental issue is measured using its own unit, for example BRE measure mineral extraction using tonnes of mineral extracted and climate change in mass of Carbon Dioxide equivalent. Using these "characterised" impacts, it is hard to make any useful comparisons. However, by comparing each environmental impact to a "norm", each impact can be measured on the same scale. BRE have taken as their norm the impacts of a typical UK citizen, calculated by dividing the impacts of the UK by its population.

### **Weightings**

Expert panels from across the industry's stakeholder groups were asked to judge the importance of many sustainability issues, covering environmental, social and economic issues. The results showed a surprising degree of consensus about the relative importance of different environmental issues across a broad range of interest groups. These are used to weight the normalised environmental impacts to provide the Ecopoints score.

### **UK Ecopoints**

A UK Ecopoint score is a measure of the overall environmental impact of a particular product or process covering the same environmental impacts described earlier.

UK Ecopoints are derived by adding together the score for each issue, calculated by multiplying the normalised impact with its percentage weighting. The annual environmental impact caused by a typical UK citizen therefore creates 100 Ecopoints. More Ecopoints indicate higher environmental impact<sup>4</sup>.

---

<sup>4</sup> Assessing environmental impacts of construction - Industry consensus, BREEAM and UK Ecopoints, I Dickie, N Howard ( 2000 ).

## The format of an Environmental Profile

The format of an Environmental Profile consists of:

### **1 Title**

The title of the Profile contains a reference to the product as it is officially recognised. For elements, this will refer to the major products of which the element is comprised.

The title may also contain a reference to a generic product, such as glass wool, which contains the average available figures from a number of plants making a wide range of glass wool products.

### **2 Quality of data information**

This is an abbreviated, user friendly format of the requirements proposed by, the Society for the Promotion of Life Cycle Development (SPOLD). Age, source, geography and the representativeness of the process are shown. For elements, this information will be referenced to the major products of which the element is comprised.

### **3 Characterised data**

### **4 Normalised data**

### **5 Ecopoint score**

## Environmental Profiles

### Environmental Profile of characterised and normalised data (Annex 1)

Characterisation and normalisation are important steps towards increasing the understanding of the impacts from a product or element. This Profile allows the user to see the contribution towards each impact category (characterised data) and relate this to the impacts of one UK citizen over one year (normalised data). The Ecopoint score is also included in this Profile.

### Elemental Profiles (Annex 2-3)

Ten elemental Profiles have been generated using the site-specific NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards data (five 'as installed' and five over a '60 year study period'). These have been based on the following specifications:

#### Pitched Roof:

##### Construction Element 1

Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Pavatherm plus 170 kg/m<sup>3</sup>), batten, clay tile.

##### Construction Element 2

Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Isolair 240 kg/m<sup>3</sup>), batten, clay tile.

#### External Wall:

##### Construction Element 3

89mm stud full filled with cellulose insulation with 60mm NBT Pavatex insulation board (Diffutherm 210 kg/m<sup>3</sup>) and mineral external render.

##### Construction Element 4

89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m<sup>3</sup>) and timber cladding.

##### Construction Element 5

89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m<sup>3</sup>) and brick slip cladding on galvanised steel supports.

### Environmental Profiles Generated for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards

Cradle to gate, cradle to site and cradle to grave Profiles have been generated for Woodfibre Board produced by Pavatex. These Profiles contain characterised and normalised data as well as an Ecopoint score. This information is summarised in Table 3 below:

**Table 3: Environmental Profiles Generated for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards**

Boundary	Data	Annex number
Cradle to gate (material)	Characterised and normalised data for 1 tonne NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.	1
Cradle to site (installed element)	Characterised and normalised data for 1 square metre of installed NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.	2
Cradle to grave (60 year study period element)	Characterised and normalised data for 1 square metre of installed NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards over a 60 year study period.	3

## **Section 2 – Analysis of Environmental Profiles for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards**

This section of the report highlights the most important sources of the product's environmental impact together with the relevant environmental issues.



## Analysis approach

The aim of the study analysis is to inform on the product manufacturing process. BRE first analyse the process occurring in the factory (the 'cradle to gate' phase) to explore the relative impacts of different products and the process to manufacture 1 tonne of the woodfibre boards. Five charts for each board are shown below. The first shows the inputs to the process by proportion of mass (per tonne). The next four graphs use Ecopoints and display environmental impact as follows:

- § Inputs into the process by proportion of environmental impact (Ecopoints/tonne NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards);
- § Analysis of environmental impact by issue (Ecopoints/tonne NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards);
- § Analysis by material and environmental issue (Ecopoints/tonne NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards). Only environmentally 'significant' materials have been included within this breakdown;
- § Analysis by process and environmental issue (Ecopoints/m<sup>2</sup> NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards).

Preceding the graphical reports, a short paragraph summarises the findings.

We then show how the products compare to other products and discuss the significance of the *Green Guide to Housing Specification*<sup>5</sup> rating received. For the comparison a full functional unit is compared over a 60-year study period (the 'cradle to grave' profile).

---

<sup>5</sup> Anderson, J, Howard, N. 2000. *The Green Guide to Housing Specification*. BRE Bookshop, London.

## Findings

Figures 1 – 4 provide analysis of NBT Pavatex insulation boards.

The waste softwood accounts for 92% of the inputs (by mass) going into the NBT Pavatex insulation boards (Figure 1). The remaining inputs collectively account for 8%.

It can be seen that while the waste softwood accounts for the largest proportion by mass of the inputs going into the product, it has a negative Ecopoint score of -4.6 (Figure 2). As this is a pre-consumer waste product from sawmilling, it has a substantial quantity of sequestered carbon dioxide which is stored within the product during its service life. This will be released back into the atmosphere upon disposal.

The manufacturing process is responsible for the greatest environmental impact overall, 3.7 Ecopoints (Figure 2).

Looking at the product as a whole, the largest impact on the environment is from Fossil Fuel Depletion (Figure 3). This primarily arises from the manufacturing process (Figure 4).

The manufacturing process does also have a significant impact on Climate Change, compared to the input materials, 2.2 Ecopoints (Figure 4); this is however obscured when comparing the impacts of the product as a whole, after combining with the large negative Ecopoint score of the waste softwood (Figure 3).

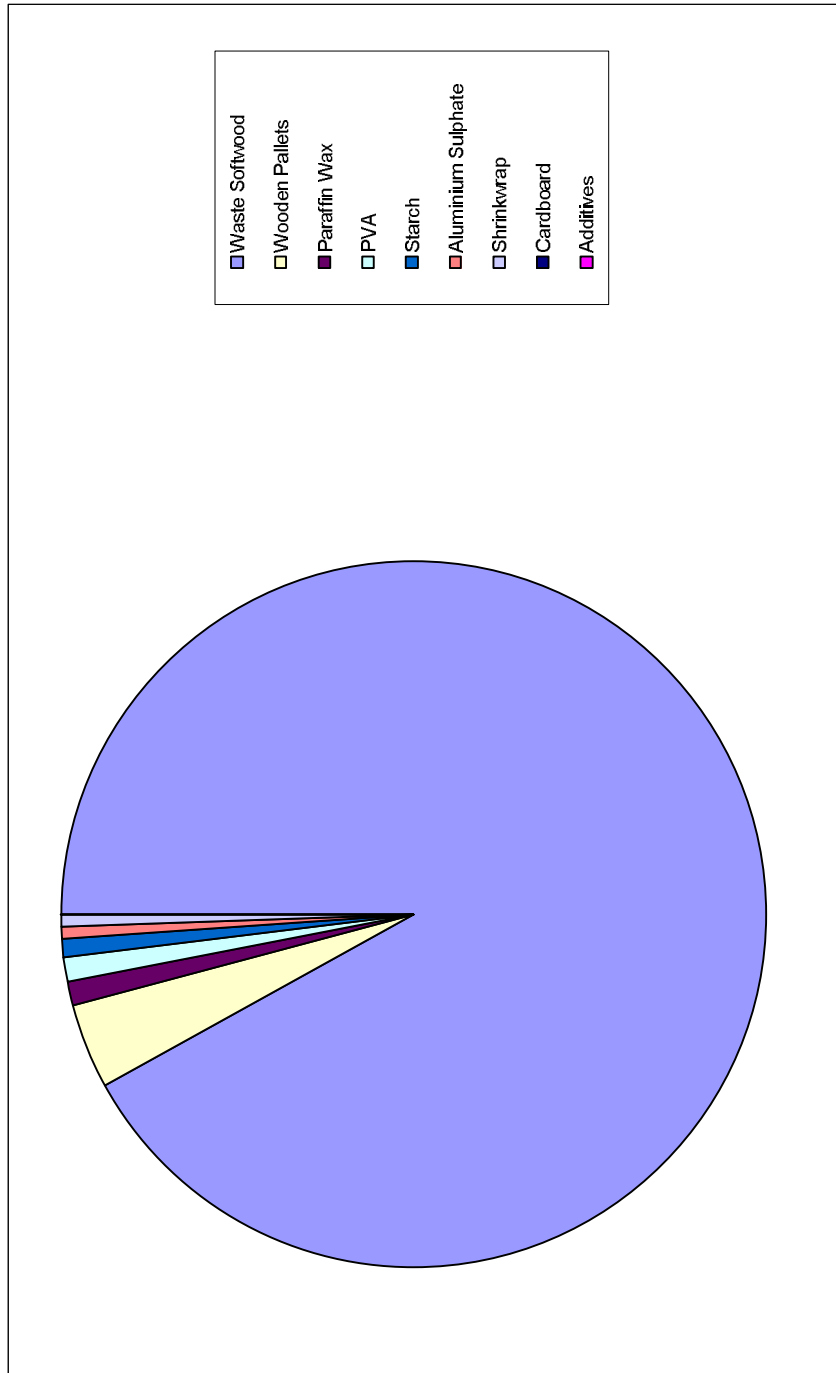


Figure 1: Inputs into process by proportion of mass (tonne). NBT Pavatex insulation boards.

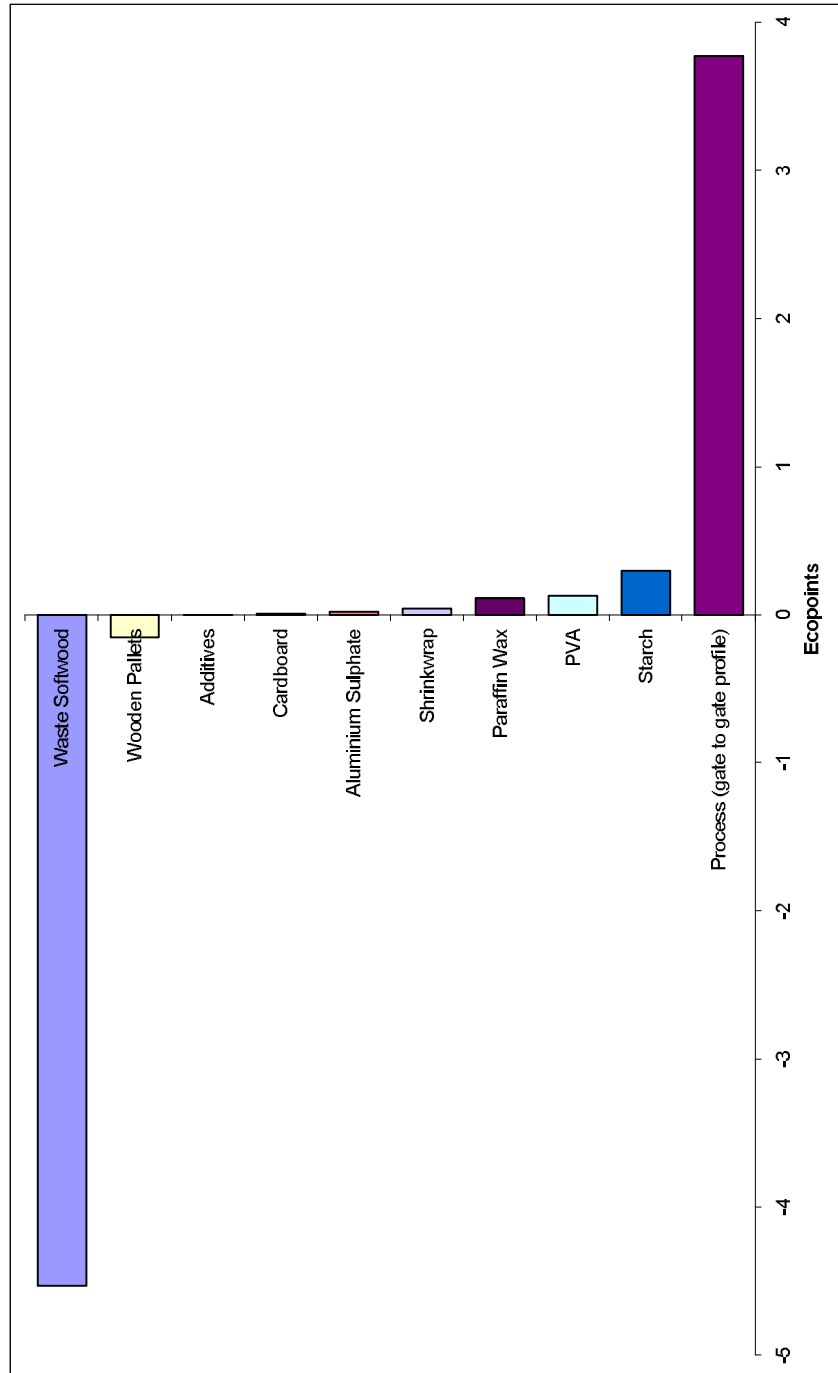


Figure 2: Inputs into process by proportion of impact (tonne). NBT Pavatex insulation boards.

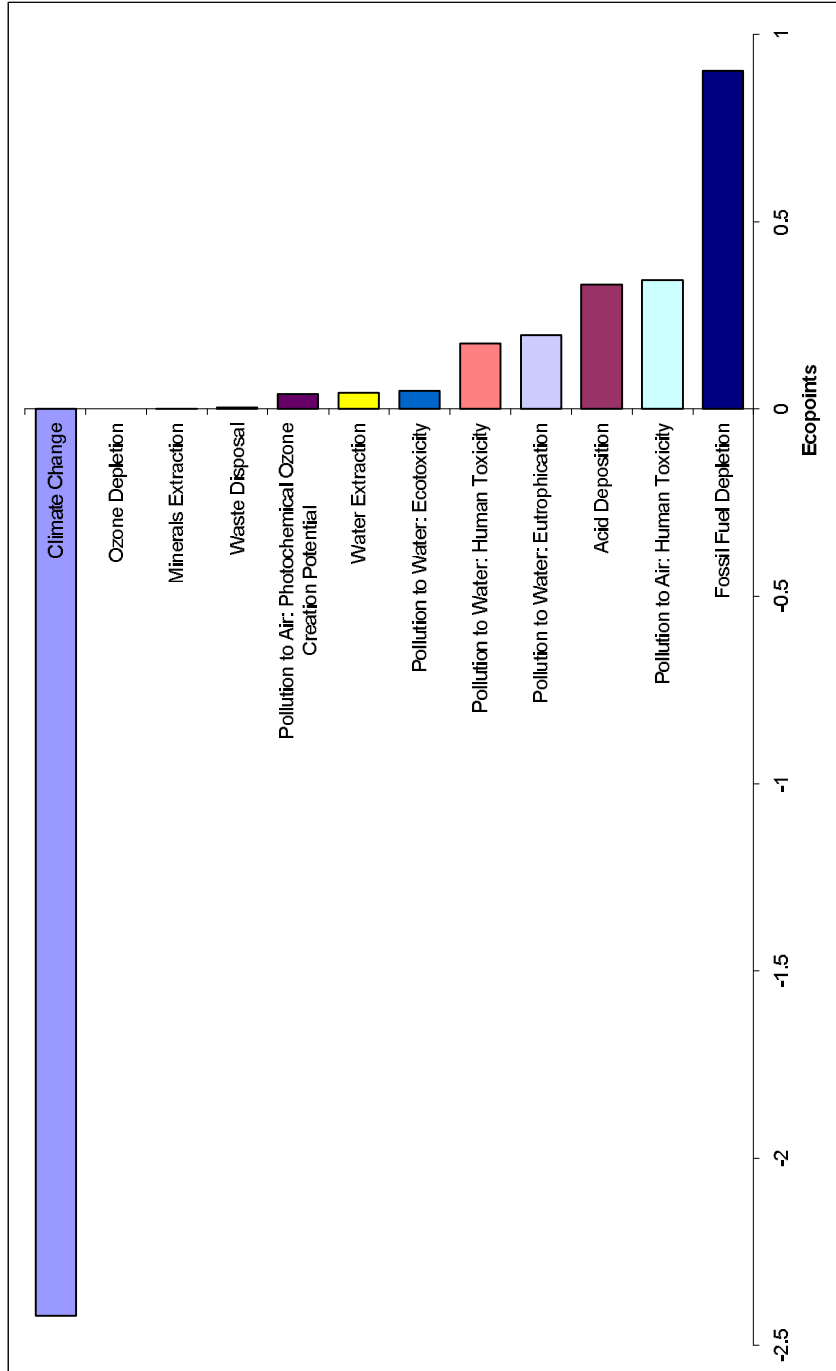


Figure 3: Breakdown of environmental impact by issue (Ecopoint/tonne). NBT Pavatex insulation boards.

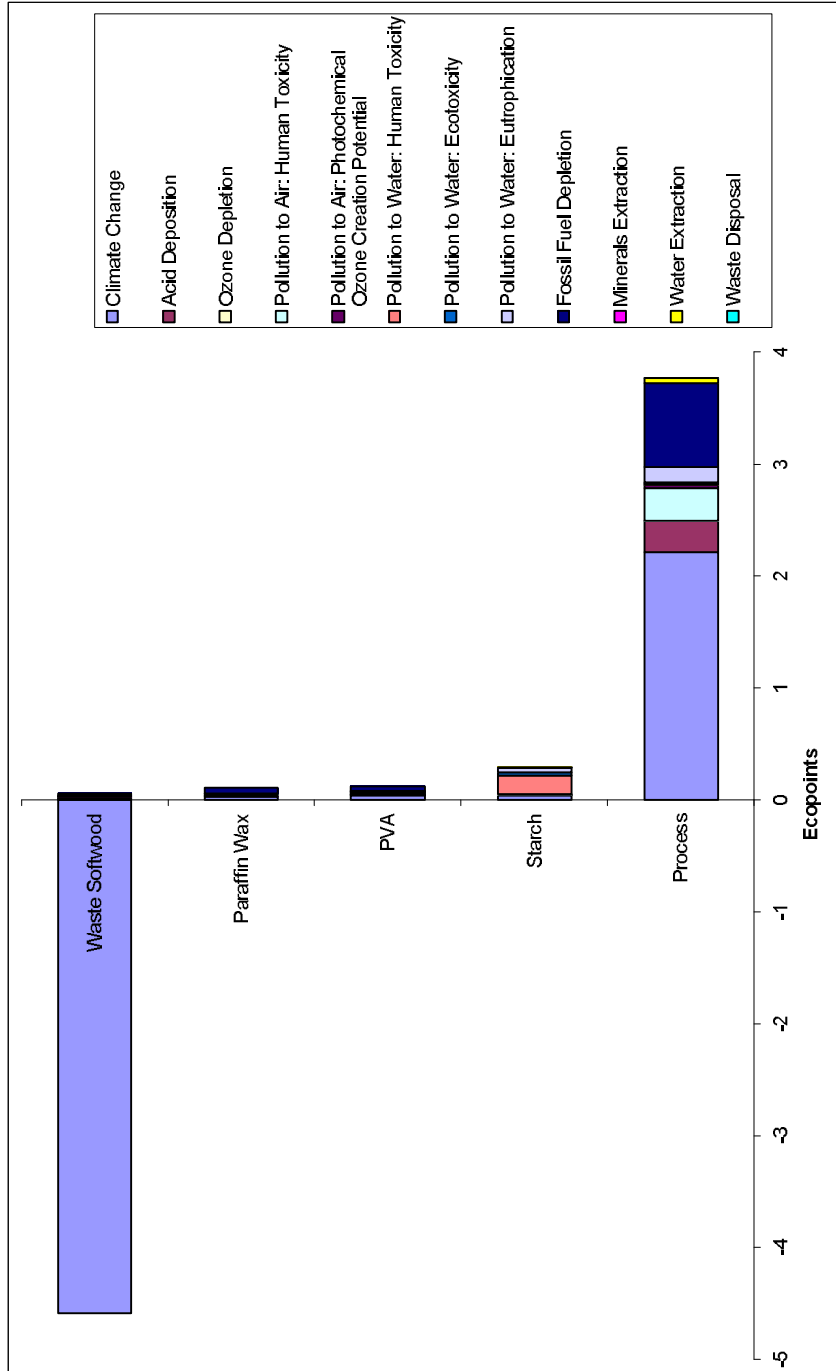


Figure 4: Breakdown by material and environmental issue (Ecopoint/tonne). NBT Pavatex insulation boards.

Figures 5 – 8 provide analysis of NBT Pavatex insulated sarking boards.

The waste softwood accounts for 90% of the inputs (by mass) going into the NBT Pavatex insulated sarking boards (Figure 5). The remaining inputs collectively account for 10%.

It can be seen that while the waste softwood accounts for the largest proportion by mass of the inputs going into the product, it has a negative Ecopoint score of -4.5 (Figure 6). As this is a pre-consumer waste product from sawmilling, it has a substantial quantity of sequestered carbon dioxide which is stored within the product during its service life. This will be released back into the atmosphere upon disposal.

The latex accounts for 4% of the inputs by mass (Figure 5), and has the second greatest environmental impact with 0.8 Ecopoint (Figure 6), the manufacturing process is responsible for the greatest environmental impact overall, 2.7 Ecopoints (Figure 6).

Looking at the product as a whole, the largest impact on the environment is from Fossil Fuel Depletion (Figure 7). This primarily arises from the manufacturing process (Figure 8).

The manufacturing process does also have a significant impact on Climate Change, compared to the input materials, 1.5 Ecopoints (Figure 8); this is however obscured when comparing the impacts of the product as a whole, after combining with the large negative Ecopoint score of the waste softwood (Figure 7).

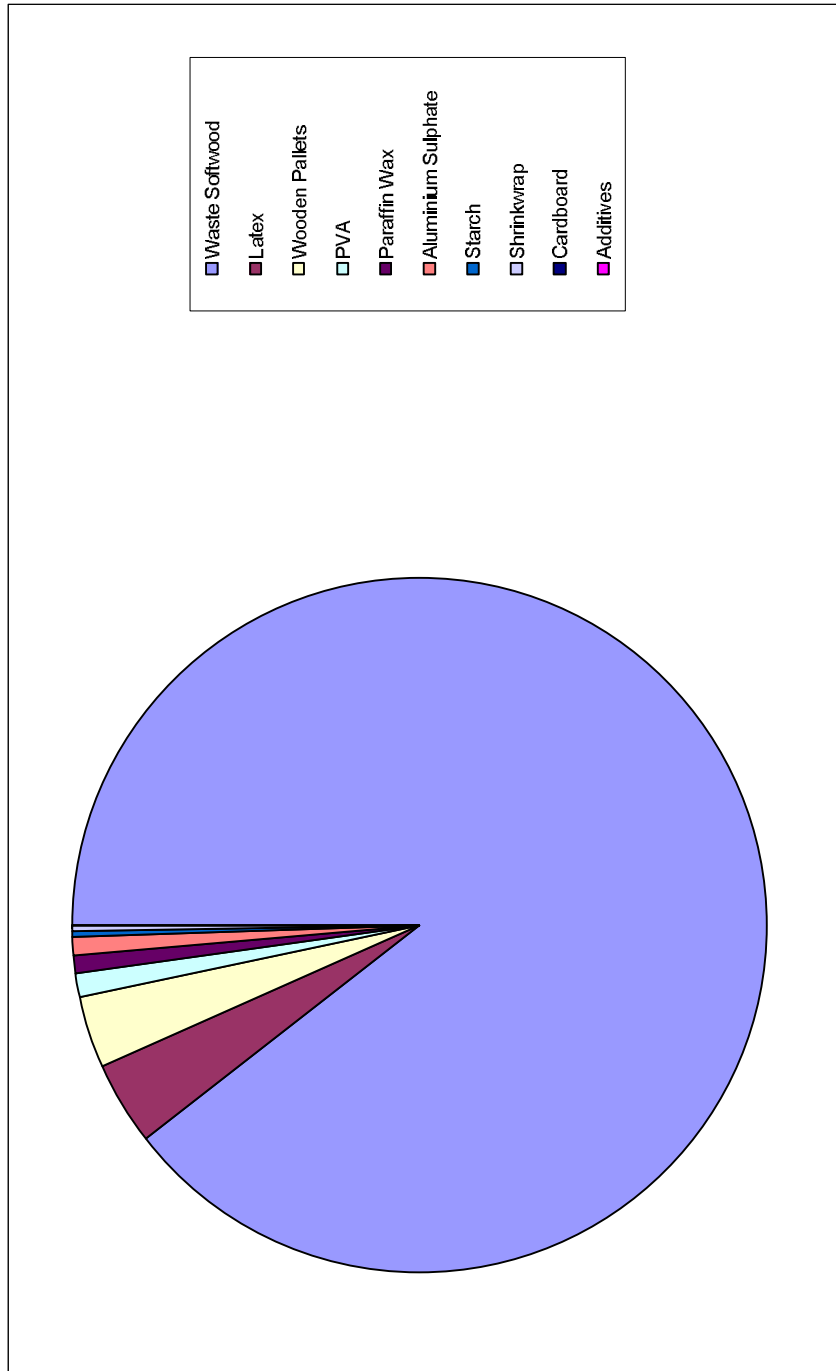


Figure 5: Inputs into process by proportion of mass (tonne). NBT Pavatex insulated sarking boards.



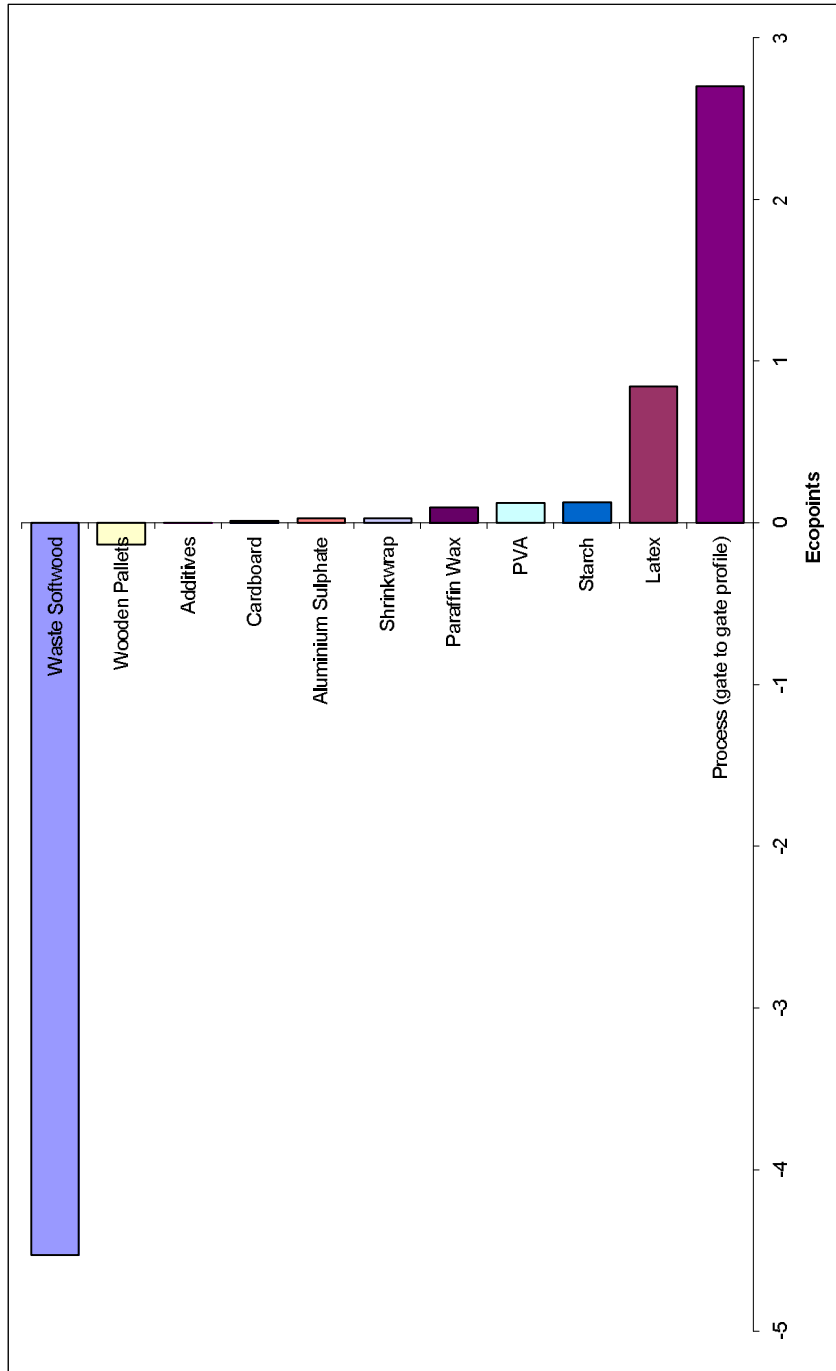


Figure 6: Inputs into process by proportion of impact (tonne). NBT Pavatex insulated sarking boards.

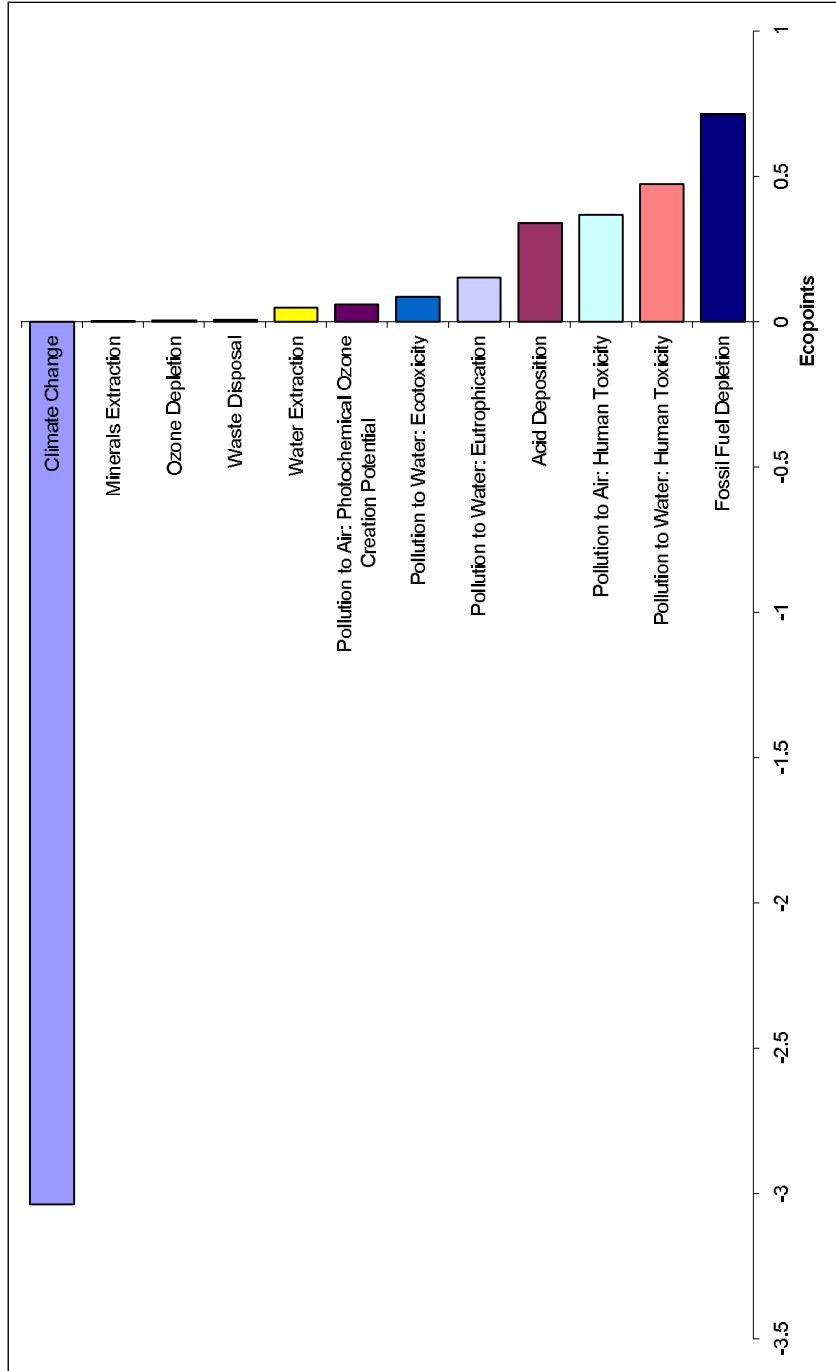


Figure 7: Breakdown of environmental impact by issue (Ecopoint/tonne). NBT Pavatex insulated sarking boards.

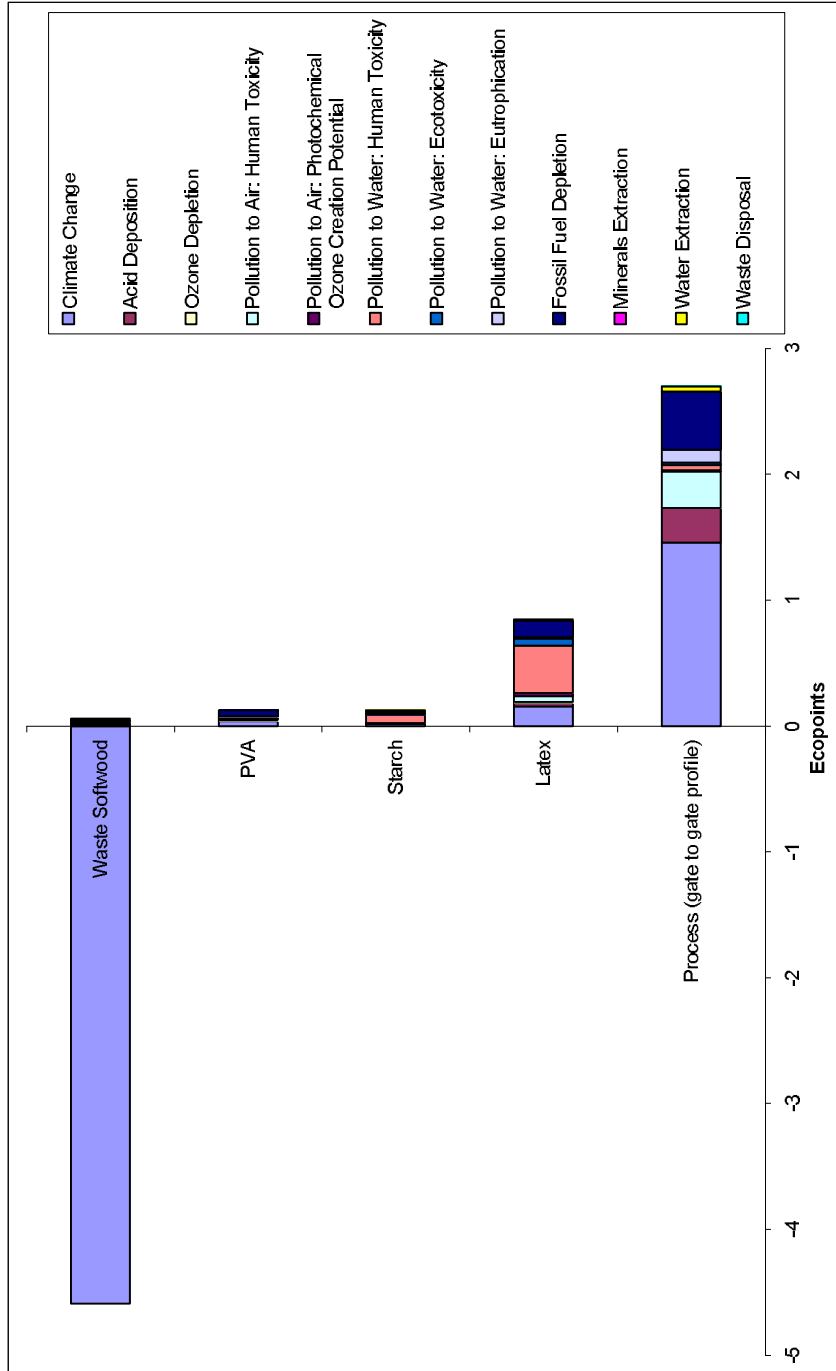


Figure 8: Breakdown by material and environmental issue (Ecopoint/tonne). NBT Pavatex insulated sarking boards.

## Linking Environmental Profiles to other Sustainable Construction Tools

### BREEAM

Construction products are of course only one part of the sustainable construction story. BRE<sup>6</sup> also manages and promotes the use of the most widely used whole building assessment tool in the UK, which has an international reputation as the leading tool of its type. This is BREEAM.

The BRE's Environmental Assessment Method (BREEAM) is a voluntary scheme for the environmental labelling of buildings, developed by BRE with private sector partners and sponsors. The basis of the scheme is a certificate awarded to the individual buildings stating clearly – and in a way that can be made *visible* to clients and users alike – the performance of the building against a set of defined environmental criteria. BREEAM is now required for all Government office buildings<sup>7</sup> – representing over 40% of construction in the UK. One of the aims of BREEAM is to encourage the use of materials that have lower impact on the environment, taking account of the full life cycle of the materials in question. Credits are awarded for selecting high performance specifications for key building elements using the *Green Guide to Specification*, for walls, floors, roofs and windows.

Manufacturers should actively promote their Ecopoint scores to registered BREEAM assessors and designers working on buildings which are to be assessed.

### EcoHomes

EcoHomes, sponsored by the NHBC, is the homes version of BREEAM. It is a voluntary scheme for the environmental labelling of new and renovated homes. It rewards developers who improve environmental performance through good design. The Housing Corporation now requires an EcoHomes rating to award grants for social housing and several developers have committed to achieving the standard. EcoHomes includes credits for selecting high performance specifications for key building elements using the *Green Guide to Housing Specification*, for walls, floors, roofs and windows.

---

<sup>6</sup> More information on these tools can be found at [www.bre.co.uk/sustainable](http://www.bre.co.uk/sustainable)

<sup>7</sup> Office of Government Commerce. Sustainability Action Plan - *achieving sustainability in construction procurement*. [www.hm-treasury.gov.uk/gccp](http://www.hm-treasury.gov.uk/gccp)

### **The Green Guide to Housing Specification**

Linked to EcoHomes, the Green Guide to Housing Specification provides guidance to designers and specifiers on the environmental impacts of common specifications used in housing. The guide uses the same format as the Green Guide to Specification.

### **Green Guide to Specification**

The *Green Guide to Specification* (Anderson, Shiers and Sinclair, Blackwells, 2002), contains tables showing summary ratings, measured in Ecopoints per m<sup>2</sup>, for all common building elements.

The Green Guide to Specification ratings are based on a 60-year life (including transport to site, replacement and disposal data). Green Guide ratings are obtained by calculating the environmental impacts associated with all the common construction specifications for a particular element, for example roofing. The range of impacts, from lowest to highest, is then divided into three, and any specification with an impact in the lowest (best) third of the range gets an A rating, in the mid part of the range, a B rating, and in the part with the highest impact, a C rating.

The Green Guide to Housing Specification elements have been given only as A, B, and C ratings within the *Conclusions and Recommendations* section.

## Conclusion and Recommendations

Tables 4a and 4b show the Ecopoints Scores and Green Guide for Housing ratings for the Environmental Profiles calculated by BRE for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.

**Table 4a. Product Specification Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards product.**

Product Specification	Ecopoints Cradle to Gate
NBT Pavatex insulation boards, 1 tonne	-0.33 Ecopoints
NBT Pavatex insulated sarking boards, 1 tonne	-0.79 Ecopoints

**Table 4b. Product Specification Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards: Cradle to Grave**

Product Specification	Ecopoints Cradle to Grave
NBT Pavatex insulation boards, 1 tonne	4.7 Ecopoints
NBT Pavatex insulated sarking boards, 1 tonne	4.3 Ecopoints

The difference in impact between the insulation board and the insulated sarking board is interesting to describe. Within each factory, the manufacture of the insulated sarking board has a higher impact due to the use of additional latex needed to achieve the waterproof properties. But the Fribourg site uses a significant proportion of non-fossil fuels which has a significant reduction on the environmental impact of the products manufactured there. Because the majority (73%) of the insulated sarking board is manufactured at Fribourg, it has a lower impact than the insulation board which is mainly manufactured at Cham (63%).

Although the manufacturing process does produce carbon emissions, the net ecopoint score for cradle to gate is negative due to the quantity of the sequestered carbon within the waste softwood. The cradle to grave score includes the impact of disposal at the end of life.

The waste softwood input has a significant amount of sequestered carbon, which is stored within the boards during their service life. This is released back to the atmosphere when the boards are disposed of.

As plants and trees grow, they absorb carbon dioxide from the atmosphere as part of photosynthesis. This carbon then remains locked in the wood during use, for example as timber or paper, providing a positive environmental benefit. On disposal, the carbon can be:

- released back into the atmosphere as carbon dioxide if it is burnt, rebalancing the environmental impact;
- released as methane if it rots in an enclosed atmosphere such as landfill, causing a much greater environmental impact because methane is a strong greenhouse gas, although the methane can be collected and burnt to produce CO<sub>2</sub> and energy which can be recovered, or;
- the carbon can remain sequestered in the timber if it is reused or recycled, passing the environmental benefit on to the new product.

BRE models the impact of disposal for timber products based on a mix of the above scenarios and applies these impacts to the Environmental Profile of a product within a building element and is disposed of at the end of life.

Looking at the products as a whole, the greatest single environmental impact is through Fossil Fuel Depletion which results primarily from the manufacturing process, for both the NBT Pavatex insulation boards and NBT Pavatex insulated sarking boards. The manufacturing process does also have a significant impact on Climate Change, compared to the input materials; this is however obscured when comparing the impacts of the product as a whole, after combining with the large negative Ecopoint score of the waste softwood.

**Table 4c. Building Element Green Guide for Housing ratings for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards.**

Element Specification	Green Guide Rating
Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Pavatherm plus 170 kg/m <sup>3</sup> ), batten, clay tile.	A
Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (isolair 240 kg/m <sup>3</sup> ), batten, clay tile.	A

Element Specification	Green Guide Rating
External Wall: 89mm stud full filled with cellulose insulation with 60mm NBT Pavatex insulation board (Diffutherm 210 kg/m <sup>3</sup> ) and mineral external render.	A
External Wall: 89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m <sup>3</sup> ) and timber cladding.	A
External Wall: 89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m <sup>3</sup> ) and brick slip cladding on galvanised steel supports.	C

The Ecopoint scores for the NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards means that they achieve a Green Guide Rating of A (with the exception of one external wall specification), when included in the studied specifications.

The external wall specification which received a C rating uses a brick slip system as the cladding component. This incorporates steel supports and additional energy and waste associated with extra processing of the brick. This, therefore contributes to a larger environmental impact.

Further improvements can be made particularly in the manufacturing process. BRE are able to model modifications in the manufacturing process, (both raw material inputs and the process itself) for NBT Pavatex insulated sarking boards and NBT Pavatex insulation boards, to indicate potential improvements.



**Annex 1 – Environmental Profile: Characterised and normalised data  
for 1 tonne of NBT Pavatex insulated sarking boards and NBT  
Pavatex insulation boards.**



# Approved Environmental Profile

Characterised and Normalised Data for 1 tonne of:

**NBT Pavatex insulated sarking board**

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Gate
Comments	

<b>Issue</b>	<b>Characterised Data</b>	<b>Unit</b>
Climate Change	-990	kg CO2 eq. (100yr)
Acid Deposition	3.9	kg SO2 eq.
Ozone Depletion	0.00014	kg CFC11 eq.
Pollution to Air: Human Toxicity	4.7	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.49	kg ethene eq.
Pollution to Water: Human Toxicity	0.0022	kg tox.
Pollution to Water: Ecotoxicity	3600	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.29	kg PO4 eq.
Fossil Fuel Depletion	0.24	toe
Minerals Extraction	0.0015	tonnes
Water Extraction	3800	litres
Waste Disposal	0.0068	tonnes
Transport Pollution & Congestion: Freight	240	tonne.km

<b>Issue</b>	<b>Normalised Data</b>	<b>UK Citizen's Impacts</b>
Climate Change	-0.08	12300 kg CO2 eq. (100yr)
Acid Deposition	0.067	58.9 kg SO2 eq.
Ozone Depletion	0.00049	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.052	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.015	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.18	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.02	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.036	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.06	4.09 toe
Minerals Extraction	0.0003	5.04 tonnes
Water Extraction	0.0091	418000 litres
Waste Disposal	0.00095	7.19 tonnes
Transport Pollution & Congestion: Freight	0.057	4140 tonne.km

<b>Primary Energy</b>	<b>13</b>	<b>GJ</b>
<b>BRE Ecopoints Score</b>	<b>-0.7</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for 1 tonne of:

**NBT Pavatex insulation board**

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulation board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Gate
Comments	

<b>Issue</b>	<b>Characterised Data</b>	<b>Unit</b>
Climate Change	-790	kg CO2 eq. (100yr)
Acid Deposition	3.8	kg SO2 eq.
Ozone Depletion	0.0000056	kg CFC11 eq.
Pollution to Air: Human Toxicity	4.5	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.33	kg ethene eq.
Pollution to Water: Human Toxicity	0.0008	kg tox.
Pollution to Water: Ecotoxicity	2000	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.37	kg PO4 eq.
Fossil Fuel Depletion	0.31	toe
Minerals Extraction	0.0011	tonnes
Water Extraction	3300	litres
Waste Disposal	0.0054	tonnes
Transport Pollution & Congestion: Freight	410	tonne.km

<b>Issue</b>	<b>Normalised Data</b>	<b>UK Citizen's Impacts</b>
Climate Change	-0.064	12300 kg CO2 eq. (100yr)
Acid Deposition	0.065	58.9 kg SO2 eq.
Ozone Depletion	0.00002	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.049	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.01	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.068	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.011	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.046	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.075	4.09 toe
Minerals Extraction	0.00021	5.04 tonnes
Water Extraction	0.0079	418000 litres
Waste Disposal	0.00075	7.19 tonnes
Transport Pollution & Congestion: Freight	0.099	4140 tonne.km

<b>Primary Energy</b>	<b>17</b>	<b>GJ</b>
<b>BRE Ecopoints Score</b>	<b>-0.3</b>	<b>Ecopoints</b>

**Annex 2 – Environmental Profile: Characterised and normalised data  
for 1 m<sup>2</sup> of installed NBT Pavatex insulated sarking boards and NBT  
Pavatex insulation boards.**



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre of Installed Roofing: Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Pavatherm plus 170 kg/m<sup>3</sup>), batten, clay tile U=0.20

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Installation on Site
Comments	

Issue	Characterised Data	Unit
Climate Change	-18	kg CO2 eq. (100yr)
Acid Deposition	0.5	kg SO2 eq.
Ozone Depletion	0.0000018	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.37	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.017	kg ethene eq.
Pollution to Water: Human Toxicity	0.000024	kg tox.
Pollution to Water: Ecotoxicity	100	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.028	kg PO4 eq.
Fossil Fuel Depletion	0.026	toe
Minerals Extraction	0.13	tonnes
Water Extraction	88	litres
Waste Disposal	0.013	tonnes
Transport Pollution & Congestion: Freight	110	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	-0.0015	12300 kg CO2 eq. (100yr)
Acid Deposition	0.0085	58.9 kg SO2 eq.
Ozone Depletion	0.0000062	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0041	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.00052	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.002	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00059	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0035	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.0064	4.09 toe
Minerals Extraction	0.027	5.04 tonnes
Water Extraction	0.00021	418000 litres
Waste Disposal	0.0018	7.19 tonnes
Transport Pollution & Congestion: Freight	0.027	4140 tonne.km
Primary Energy	1.2	GJ
<b>BRE Ecopoints Score</b>	<b>0.22</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre of Installed Roofing: Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (isolair 240 kg/m<sup>3</sup>), batten, clay tile U=0.20

**Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)**

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Installation on Site
Comments	

Issue	Characterised Data	Unit
Climate Change	-21	kg CO2 eq. (100yr)
Acid Deposition	0.53	kg SO2 eq.
Ozone Depletion	0.0000024	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.4	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.019	kg ethene eq.
Pollution to Water: Human Toxicity	0.000033	kg tox.
Pollution to Water: Ecotoxicity	120	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.03	kg PO4 eq.
Fossil Fuel Depletion	0.028	toe
Minerals Extraction	0.15	tonnes
Water Extraction	100	litres
Waste Disposal	0.014	tonnes
Transport Pollution & Congestion: Freight	120	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	-0.0017	12300 kg CO2 eq. (100yr)
Acid Deposition	0.009	58.9 kg SO2 eq.
Ozone Depletion	0.0000082	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0044	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.00059	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0028	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.0007	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0037	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.0068	4.09 toe
Minerals Extraction	0.029	5.04 tonnes
Water Extraction	0.00025	418000 litres
Waste Disposal	0.002	7.19 tonnes
Transport Pollution & Congestion: Freight	0.028	4140 tonne.km
Primary Energy	1.3	GJ
<b>BRE Ecopoints Score</b>	<b>0.24</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre of Installed External Wall: Framed Wall  
Construction: 89mm stud full filled with cellulose insulation  
with 60mm NBT Pavatex insulation board (Diffutherm 210  
kg/m<sup>3</sup>) and mineral external render U = 0.25

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulation board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Installation on Site
Comments	

Issue	Characterised Data	Unit
Climate Change	1.4	kg CO2 eq. (100yr)
Acid Deposition	0.19	kg SO2 eq.
Ozone Depletion	0.000000099	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.25	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.023	kg ethene eq.
Pollution to Water: Human Toxicity	0.000011	kg tox.
Pollution to Water: Ecotoxicity	31	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.015	kg PO4 eq.
Fossil Fuel Depletion	0.0075	toe
Minerals Extraction	0.086	tonnes
Water Extraction	110	litres
Waste Disposal	0.0048	tonnes
Transport Pollution & Congestion: Freight	26	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.00011	12300 kg CO2 eq. (100yr)
Acid Deposition	0.0032	58.9 kg SO2 eq.
Ozone Depletion	0.00000035	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0028	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.00073	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0009	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00017	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0018	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.0018	4.09 toe
Minerals Extraction	0.017	5.04 tonnes
Water Extraction	0.00025	418000 litres
Waste Disposal	0.00067	7.19 tonnes
Transport Pollution & Congestion: Freight	0.0062	4140 tonne.km
Primary Energy	0.38	GJ
<b>BRE Ecopoints Score</b>	<b>0.14</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre of Installed External Wall: Framed Wall Construction: 89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m<sup>3</sup>) and timber cladding U = 0.30

**Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)**

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Installation on Site
Comments	

Issue	Characterised Data	Unit
Climate Change	-25	kg CO2 eq. (100yr)
Acid Deposition	0.086	kg SO2 eq.
Ozone Depletion	0.00000076	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.091	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.023	kg ethene eq.
Pollution to Water: Human Toxicity	0.000012	kg tox.
Pollution to Water: Ecotoxicity	25	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0073	kg PO4 eq.
Fossil Fuel Depletion	0.0044	toe
Minerals Extraction	0.027	tonnes
Water Extraction	40	litres
Waste Disposal	0.0013	tonnes
Transport Pollution & Congestion: Freight	43	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	-0.0021	12300 kg CO2 eq. (100yr)
Acid Deposition	0.0015	58.9 kg SO2 eq.
Ozone Depletion	0.0000027	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.001	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.00071	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.001	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00014	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.00091	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.0011	4.09 toe
Minerals Extraction	0.0054	5.04 tonnes
Water Extraction	0.000096	418000 litres
Waste Disposal	0.00018	7.19 tonnes
Transport Pollution & Congestion: Freight	0.01	4140 tonne.km
Primary Energy	0.21	GJ
<b>BRE Ecopoints Score</b>	<b>-0.02</b>	<b>Ecopoints</b>





# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre of Installed External Wall: Framed Wall Construction: 89mm stud full filled with cellulose insulation with 22mm NBT Pavatex insulated sarking board (Isolair 240 kg/m<sup>3</sup>) and brick cladding U = 0.30

**Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)**

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Installation on Site
Comments	

Issue	Characterised Data	Unit
Climate Change	150	kg CO2 eq. (100yr)
Acid Deposition	0.8	kg SO2 eq.
Ozone Depletion	0.00000077	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.68	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.3	kg ethene eq.
Pollution to Water: Human Toxicity	0.000034	kg tox.
Pollution to Water: Ecotoxicity	320	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.037	kg PO4 eq.
Fossil Fuel Depletion	0.05	toe
Minerals Extraction	0.17	tonnes
Water Extraction	950	litres
Waste Disposal	0.016	tonnes
Transport Pollution & Congestion: Freight	970	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.012	12300 kg CO2 eq. (100yr)
Acid Deposition	0.014	58.9 kg SO2 eq.
Ozone Depletion	0.0000027	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0075	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.0094	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0029	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.0018	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0046	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.012	4.09 toe
Minerals Extraction	0.035	5.04 tonnes
Water Extraction	0.0023	418000 litres
Waste Disposal	0.0022	7.19 tonnes
Transport Pollution & Congestion: Freight	0.24	4140 tonne.km
Primary Energy	2.3	GJ
<b>BRE Ecopoints Score</b>	<b>0.93</b>	<b>Ecopoints</b>

**Annex 3 – Environmental Profile: Characterised and normalised data  
for 1 m<sup>2</sup> NBT Pavatex insulated sarking boards and NBT Pavatex  
insulation boards over a 60-year study period.**



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre over 60 Year Study Period: Roofing: Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (Pavatherm plus 170 kg/m<sup>3</sup>), batten, clay tile U=0.20

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Grave over 60 Year Building Life
Comments	

Issue	Characterised Data	Unit
Climate Change	95	kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.77	kg SO <sub>2</sub> eq.
Ozone Depletion	0.0000027	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.59	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.051	kg ethene eq.
Pollution to Water: Human Toxicity	0.000035	kg tox.
Pollution to Water: Ecotoxicity	160	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.047	kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.039	toe
Minerals Extraction	0.2	tonnes
Water Extraction	130	litres
Waste Disposal	0.14	tonnes
Transport Pollution & Congestion: Freight	170	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.0078	12300 kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.013	58.9 kg SO <sub>2</sub> eq.
Ozone Depletion	0.0000093	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0065	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.0016	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.003	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00088	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0059	8.01 kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.0096	4.09 toe
Minerals Extraction	0.04	5.04 tonnes
Water Extraction	0.00032	418000 litres
Waste Disposal	0.02	7.19 tonnes
Transport Pollution & Congestion: Freight	0.041	4140 tonne.km
Primary Energy	1.8	GJ
<b>BRE Ecopoints Score</b>	<b>0.83</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre over 60 Year Study Period: Roofing: Pitched Roof: Plasterboard, 150mm rafters full filled with cellulose insulation and 60mm NBT Pavatex insulated sarking board counter batten (isolair 240 kg/m<sup>3</sup>), batten, clay tile U=0.20

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Grave over 60 Year Building Life
Comments	

Issue	Characterised Data	Unit
Climate Change	100	kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.82	kg SO <sub>2</sub> eq.
Ozone Depletion	0.0000035	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.62	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.056	kg ethene eq.
Pollution to Water: Human Toxicity	0.000049	kg tox.
Pollution to Water: Ecotoxicity	190	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.05	kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.042	toe
Minerals Extraction	0.22	tonnes
Water Extraction	160	litres
Waste Disposal	0.16	tonnes
Transport Pollution & Congestion: Freight	170	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.0082	12300 kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.014	58.9 kg SO <sub>2</sub> eq.
Ozone Depletion	0.000012	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0069	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.0017	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0042	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.001	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0062	8.01 kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.01	4.09 toe
Minerals Extraction	0.043	5.04 tonnes
Water Extraction	0.00037	418000 litres
Waste Disposal	0.022	7.19 tonnes
Transport Pollution & Congestion: Freight	0.042	4140 tonne.km
Primary Energy	1.9	GJ
<b>BRE Ecopoints Score</b>	<b>0.89</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre over 60 Year Study Period: External Wall:  
 Framed Wall Construction: 89mm stud full filled with cellulose  
 insulation with 60mm NBT Pavatex insulation board (Diffutherm  
 210 kg/m<sup>3</sup>) and mineral external render U = 0.25

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulation board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Grave over 60 Year Building Life
Comments	

Issue	Characterised Data	Unit
Climate Change	44	kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.3	kg SO <sub>2</sub> eq.
Ozone Depletion	0.00000015	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.4	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.068	kg ethene eq.
Pollution to Water: Human Toxicity	0.000016	kg tox.
Pollution to Water: Ecotoxicity	46	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.024	kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.013	toe
Minerals Extraction	0.13	tonnes
Water Extraction	170	litres
Waste Disposal	0.094	tonnes
Transport Pollution & Congestion: Freight	39	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.0036	12300 kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.0051	58.9 kg SO <sub>2</sub> eq.
Ozone Depletion	0.00000052	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0044	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.0021	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0013	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00026	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.003	8.01 kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.0032	4.09 toe
Minerals Extraction	0.026	5.04 tonnes
Water Extraction	0.00041	418000 litres
Waste Disposal	0.013	7.19 tonnes
Transport Pollution & Congestion: Freight	0.0094	4140 tonne.km
Primary Energy	0.64	GJ
<b>BRE Ecopoints Score</b>	<b>0.43</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre over 60 Year Study Period: External Wall:  
 Framed Wall Construction: 89mm stud full filled with cellulose  
 insulation with 22mm NBT Pavatex insulated sarking board  
 (Isolair 240 kg/m<sup>3</sup>) and timber cladding U = 0.30

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Grave over 60 Year Building Life
Comments	

Issue	Characterised Data	Unit
Climate Change	21	kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.18	kg SO <sub>2</sub> eq.
Ozone Depletion	0.0000011	kg CFC11 eq.
Pollution to Air: Human Toxicity	0.2	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.076	kg ethene eq.
Pollution to Water: Human Toxicity	0.000019	kg tox.
Pollution to Water: Ecotoxicity	38	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.018	kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.0097	toe
Minerals Extraction	0.04	tonnes
Water Extraction	77	litres
Waste Disposal	0.038	tonnes
Transport Pollution & Congestion: Freight	90	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.0017	12300 kg CO <sub>2</sub> eq. (100yr)
Acid Deposition	0.0031	58.9 kg SO <sub>2</sub> eq.
Ozone Depletion	0.000004	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.0022	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.0024	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0016	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.00021	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.0022	8.01 kg PO <sub>4</sub> eq.
Fossil Fuel Depletion	0.0024	4.09 toe
Minerals Extraction	0.008	5.04 tonnes
Water Extraction	0.00019	418000 litres
Waste Disposal	0.0053	7.19 tonnes
Transport Pollution & Congestion: Freight	0.022	4140 tonne.km
Primary Energy	0.45	GJ
<b>BRE Ecopoints Score</b>	<b>0.21</b>	<b>Ecopoints</b>



# Approved Environmental Profile

Characterised and Normalised Data for:

1 square metre over 60 Year Study Period: External Wall:  
 Framed Wall Construction: 89mm stud full filled with cellulose  
 insulation with 22mm NBT Pavatex insulated sarking board  
 (Isolair 240 kg/m3) and brick cladding U = 0.30

## Quality of Data for Profiled Material (Data for other constituent materials are available from BRE)

Start Date	1 January 2005
End Date	31 December 2005
Source of Data	Company records
Geography	Switzerland
Representativeness	2 sites representing 100% NBT Pavatex insulated sarking board.
LCA Methodology	BRE Environmental Profiles Methodology
Allocation	100% to product
Date of Data Entry	2 August 2006
Boundary	Cradle to Grave over 60 Year Building Life
Comments	

Issue	Characterised Data	Unit
Climate Change	250	kg CO2 eq. (100yr)
Acid Deposition	1.2	kg SO2 eq.
Ozone Depletion	0.0000012	kg CFC11 eq.
Pollution to Air: Human Toxicity	1	kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.48	kg ethene eq.
Pollution to Water: Human Toxicity	0.000051	kg tox.
Pollution to Water: Ecotoxicity	480	m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.056	kg PO4 eq.
Fossil Fuel Depletion	0.076	toe
Minerals Extraction	0.26	tonnes
Water Extraction	1400	litres
Waste Disposal	0.13	tonnes
Transport Pollution & Congestion: Freight	1500	tonne.km

Issue	Normalised Data	UK Citizen's Impacts
Climate Change	0.02	12300 kg CO2 eq. (100yr)
Acid Deposition	0.021	58.9 kg SO2 eq.
Ozone Depletion	0.000004	0.286 kg CFC11 eq.
Pollution to Air: Human Toxicity	0.011	90.7 kg tox.
Pollution to Air: Photochemical Ozone Creation Potential	0.015	32.2 kg ethene eq.
Pollution to Water: Human Toxicity	0.0043	0.0117 kg tox.
Pollution to Water: Ecotoxicity	0.0027	178000 m <sup>3</sup> tox.
Pollution to Water: Eutrophication	0.007	8.01 kg PO4 eq.
Fossil Fuel Depletion	0.019	4.09 toe
Minerals Extraction	0.052	5.04 tonnes
Water Extraction	0.0034	418000 litres
Waste Disposal	0.018	7.19 tonnes
Transport Pollution & Congestion: Freight	0.35	4140 tonne.km
Primary Energy	3.5	GJ
<b>BRE Ecopoints Score</b>	<b>1.6</b>	<b>Ecopoints</b>

## Annex 4 - Impact categories considered in BRE LCA methodology.

### Climate change (kg CO<sub>2</sub> eq.)

"Global warming" is associated with problems of increased desertification, rising sea levels, climatic disturbance and spread in disease. It has been the subject of major international activity, and methods for measuring it have been presented by the Intergovernmental Panel on Climate Change (IPCC).

Gases recognised as having a "greenhouse" or radiative forcing effect include CFCs, HFCs, N<sub>2</sub>O and methane. Their relative global warming potential (GWP) has been calculated by comparing their direct and indirect radiative forcing to the emission of the same mass of CO<sub>2</sub> after 100 years. E.g. CFC-11 is 3400 times more powerful as a greenhouse gas than CO<sub>2</sub> and therefore one tonne of CFC-11 is equivalent to 3400 tonnes CO<sub>2</sub>. Global warming potential is measured in CO<sub>2</sub> equivalents for each emission, which can be added and entered into the Profile under "Climate change" as CO<sub>2</sub> equivalents (100yrs).

A timescale is applied to the GWP figure because the GWP of different gases is related to the amount of time they will spend in the atmosphere and the amount of radiative forcing they will induce over that period. It is important to recognise how long the gases will last in the atmosphere. For example, both carbon dioxide and CFC-11 are greenhouse gases but they have different half lives in the atmosphere and they will thus have a different relative effect over different timescales. Three different scenarios are available for GWP: 20 years, 100 years and 500 years. The 100 year scenario is most commonly used and has been applied in the BRE Environmental Profiles.

### Fossil fuel depletion (toe)

This unit reflects the total quantity of fossil fuel energy depleted by consumption. It is measured in *tonnes of oil equivalents* - (toes), which is a unit of energy. The characterisation method assumes that the energy content of all fossil fuels is equally valuable to total fossil fuel resources. This is measured from the perspective of their depletion with a characterisation factor of 1 per tonne of oil equivalent for all fossil fuels. The characterisation factor for all fossil fuels will then be the primary energy value of the fuel in toe.

### Acid deposition (kg SO<sub>2</sub> eq.)

Acid deposition on landscapes causes ecosystem impairment of varying degree, depending upon the nature of the landscape ecosystems.

Gases are related to the acidification of one tonne of Sulphur Dioxide (SO<sub>2</sub>). They include Ammonia, Hydrochloric acid, Hydrogen Fluoride, Nitrous Oxides and Sulphur Oxides. The equivalents are calculated by dividing the contribution of protons (H<sup>+</sup>) to the ecosystem from a compound with the contribution from SO<sub>2</sub>.



**Ozone depletion (kg CFC11 eq.)**

Ozone depleting gases cause damage to stratospheric ozone or the "ozone layer". There is great uncertainty about the combined effects of different gases in the stratosphere and all chlorinated and brominated compounds that are stable enough to reach the stratosphere can have an effect. CFC manufacture was banned from the year 2000 and HCFCs will be phased out by 2015. In the characterisation method, gases are related to the ozone depletion potential (ODP) of one kilogram CFC-11.

**Human toxic air pollution and water pollution and ecotoxic water pollution (Kg. toxicity and m<sup>3</sup>. toxicity)**

The subject of toxicity is a particularly complex area within impact assessment and a variety of different techniques have been developed. The four categories proposed by Heijungs (1992) at the University of Leiden for the CML method is the most widely accepted method and BRE therefore advocate the use of this technique in the absence of more definitive works. CML developed a provisional method of toxicological weighting factors. For human toxicity these are then calculated as (human toxicological classification factor) x (kg body weight/kg substance). The factors are based on tolerable concentrations in air, air quality guidelines, tolerable daily intakes and acceptable daily intake.

BRE are paying close attention to developments in the field and are particularly interested in the work of the World Health Organisation to develop Disability Adjusted Life years (DALYs) and Percentage Affected Fractions (PAFs) for human and ecotoxic effects respectively.

**Photochemical ozone creation (kg ethene eq.)**

In atmospheres containing nitrogen oxides, ozone creation occurs under the influence of radiation from the sun. Different hydrocarbons react to form ozone at different rates and both NO<sub>x</sub> and volatile organic compounds (VOCs) can control the rate of this photo-oxidation process. Increased ozone in the lower part of the atmosphere is important at a local, regional and global scale but impact assessment methods concentrate on the local and regional impacts. The formation of ozone and other oxidants, such as nitrogen dioxide, hydrogen peroxide and aldehydes, are implicated in impacts as diverse as crop damage and increased incidence of asthma and other respiratory complaints. The method used for characterisation in the Profile comes from CML and compares the photochemical ozone creation potential of VOCs to that of ethene.

**Eutrophication (kgPO<sub>4</sub>)**

Phosphate is the unit against which a number of emissions to air and water are measured for their equivalent eutrophication or "nutrification" potential, leading to loss of biodiversity through over-enrichment of water supplies. Species dependent on low-nutrient environments are lost and algal blooms occur in water, increasing mortality of aquatic fauna and flora. Ammonia, Nitrates, Nitrous Oxides and total Nitrogen and Phosphorous are included within this part of the Profile. This characterisation factor is derived from the Dutch CML method.

**Minerals extraction (tonnes)**

This unit was selected to reflect the total quantity of mineral resource extracted. This applies to all minerals, including metal ore, and applies to both UK and overseas extraction. The extraction of minerals for building in the UK is a high Profile environmental topic but the minerals themselves are not considered to be scarce. This unit is not currently used to make such a distinction. The assumption is that this unit is a proxy for levels of local environmental impact from mineral extraction. The characterisation method assumes that all mineral extractions are equally disruptive of the local environment and a characterisation factor of 1 is used per tonne of material extracted.

**Water extraction (litres)**

This unit was selected to reflect the depletion, disruption or pollution of aquifers or disruption or pollution of rivers and their ecosystems due to over abstraction. The characterisation factor is 1 per cubic metre and assumes that all abstractions are equally damaging. This is a significant area of impact which warrants further research.

**Waste disposal (tonnes)**

At the present time, it is most practical to use a tonne of waste as a proxy for the impacts arising from waste disposal. This unit was selected to reflect the depletion of landfill capacity, the noise, dust and odour from landfill (and other disposal) sites, the gaseous emissions and leachate pollution from incineration and landfill, the loss of resources from economic use and risk of underground fires etc. The characterisation factor is 1 assuming that 1 tonne of any waste is equally deleterious. In practice, wastes will vary in their putrescible content, combustibility, leachability of toxic substances etc. The exception to the "proxy" status of the associated impacts is for greenhouse gases. The greenhouse emissions from landfill and incineration are included in the sixty year life element Profile.

**Transport pollution & congestion (tonne.km)**

This unit was chosen to reflect the impacts arising from the transport of freight world wide, including ocean travel. It is particularly useful because it provides a figure for an impact over which producers have direct control. Tonne.km reflect the local transport pollution, congestion, noise, dust and discomfort to travellers and to those local transport routes especially roads. The characterisation factor used is 1, implying that all modes of tonne.km are equally damaging. This characterisation factor will be the subject of future refinement. It is recognised that transport associated with the production and construction of buildings is also converted to emissions to atmosphere from the combustion of the fuel used and primary energy figures reflect the production of the fuel itself. Tonnes.km is not displayed to reflect these impacts, which are accurately accounted for within the other categories and therefore does not produce a double counting effect.